










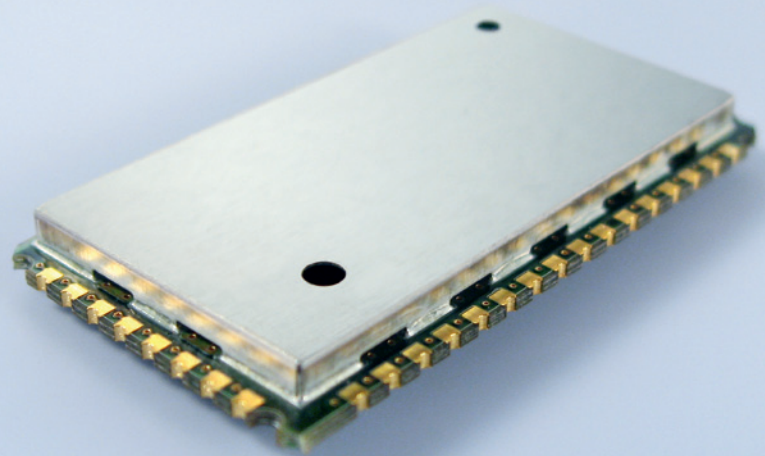

License-Free System for Frequencies <1 GHz

Embedded

TinyOne™ Pro 868 MHz RF modules

38.4 Kbps - 500 mW



-  ETSI Compliant
-  RoHS and WEEE Compliant
-  Embedded S-One or M-One Stack
-  Ultra Low Power Consumption+Std-by Mode
-  500mW for Long Range Applications
-  DOTA - Upgradeable and Configurable Over-the-Air
-  SMD Component
-  TTL RS232 Interface + Digital and Analog I/Os
-  2.54 mm DIP Adapter Available
-  SAW Filter | Best-in-Class Interference Immunity

TinyOne™ Pro OEM RF modules, based on Telit's TinyOne™ concept, are optimized for long-range solutions in the license-free ISM band of 868 MHz and operate at a temperature range of -40° C to +85° C.

These pre-certified SMD RF modules provide a TTL RS232 interface, integrated digital and analog I/O's, and advanced embedded proprietary S-One and M-One stacks.

The modules are easily integrated into applications such as energy monitoring (windmills and solar panels), weather stations, irrigation, and watering, thus reducing development time and cost while providing highly reliable communications.

Performance

- Range: 4,000 m
- Output Power: 500 mW (at 3.6 V)
- Serial Data Rate: Up to 115.2 Kbps
- Radio Data Rate: 4.8 to 38.4 Kbps
- Sensitivity (BER < 10-3): -105 dBm (at 4.8 Kbps)

Power Requirements

- Power Supply: 3 to 3.6 V
- Board Consumption at 3.6 V:
Rx: 35 mA
Tx: 600 mA
Std-by: 4 µA

Physical Properties

- Board Format:
Rectangular 38 x 21 mm, height 4 mm
- Temperature: -40°C to +85°C

Networking

- Frequency: 869.4 - 869.65 MHz
- Channels: 1 or 10
- Modulation: GFSK
- Serial Interface: RS232 TTL

- Hayes Mode: Yes
- Transparent Mode: Yes
- ACK Mode: Yes
- Addressed Mode: Yes
- Client/Server Mode: Yes
- Repeater Mode: No
- Mesh Network: Yes
- I/O Copy: Yes
- Listen Before Talk: Yes
- Telemetry: Yes
- Download Over-the-Air: Yes

Order-No.


Please contact your Telit representative for order codes and further information.



TinyOne™ Pro 868 MHz RF modules



(a)



(a)



(a)

actual size

Optional Features


- TinyOne™ Pro 868 MHz RF modules are available:
 - (a) without integrated antenna
 - (b) in DIP version

License-Free System for Frequencies <1 GHz

Compact

TinyOne™ Pro 868 MHz RF modules-Interface

38.4 Kbps - 500 mW

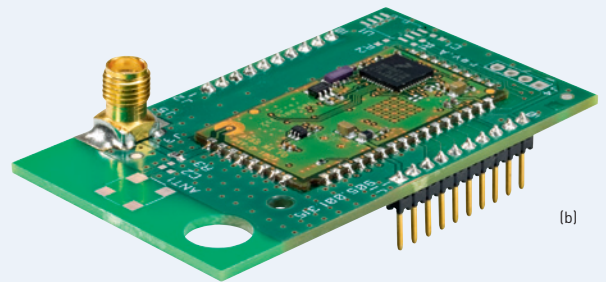

(b)

Demo Kit & Development Tools

Demo kits with development tools are available for testing and to assist with integration into the final application.

Call +33 (0)4 97 21 33 10 to order your demo kit



Copyright © 2009, Telit Communications S.p.A.
Subject to changes in technology, design and availability
© Anne AKTAN - Fotolia.com

Distributed by:



Telit Communications S.p.A.
Via Stazione di Prosecco, 5/B
I-34010 Sgonico (Trieste), Italy
Tel +39 040 4192 200
Fax +39 040 4192 289
E-Mail: EMEA@telit.com
www.telit.com

Telit Wireless Solutions Inc.
3131 RDU Center Drive, Suite 135
Morrisville, NC 27560, USA
Tel +1 888 846 9773 or +1 919 439 7977
Fax +1 888 846 9774 or +1 919 840 0337
E-Mail: NORTHAMERICA@telit.com
www.telit.com

Telit Wireless Solutions Inc.
Rua Cunha Gago, 700 - cj 81, Pinheiros
São Paulo - SP, 05421001, Brazil
Tel +55 11 2679 4654
Fax +55 11 2679 4654
E-Mail: LATINAMERICA@telit.com
www.telit.com

Telit Wireless Solutions Co., Ltd.
9th Fl., Daewoo Securities Bld.
34-3 Yeouido-dong, Yeongdeungpo-gu
Seoul 150-716, KOREA
Tel +82 2 368 4600
Fax +82 2 368 4606
E-Mail: APAC@telit.com
www.telit.com

